

KT-0400 Ice Kube Machine

Models

KDT-0400A KYT-0400A KDT-0400W KYT-0400W





Koolaire KT-0400 Ice Kube Machine on K400 Bin

Ice Machine Electric

115/60/1 standard (air cooled also available in 208-230V)

Minimum circuit ampacity:

Air-cooled: 12.1 (115V) 6.2 (208-230V)

Water-cooled: 11.4 (115V)

Maximum fuse size:

Air Cooled: 20 Amps (115V) 15 Amps (208-230V)

Water cooled: 20 Amps (115V)

Specifications

BTU Per Hour:

3,800 (average), and 6,000 (peak)

Refrigerant:

R410A CFC - Free Lowers global warming by 48%

Operating Limits:

- Ambient Temperature Range: 40° to 110°F (4.4° to 43.3°C) Water Temperature Range: 40° to 90°F (4.4° to 32.2°C)
- · Water Pressure Ice Maker Water In:

Min. 20 psi (137.9 kPA) Max. 80 psi (551.1 kPA) Koolaire by Manitowoc ice machines are designed, developed and tested by Manitowoc engineers to provide great ice production, energy efficiency and reliable service at an affordable price.

Performance/Features/Benefits

- Produces up to 450 lbs (204 kg) of ice per day**
- Performance certified by the Air Conditioning, Heating and Refrigeration Institute (ÁHRI)
- Energy Efficient models visit EnergyStar.gov to view all Energy Star qualifying models
- · Highly efficient electro-less nickel plated copper evaporators made in Manitowoc WI, USA
- Simple operation only one control, three positions ON/OFF/
- High-Tech exterior with smudge and fingerprint resistant stainless-like finish
- Better for the environment. Uses R410A refrigerant which lowers global warming potential by 48%
- Backed by the industry's best Manitowoc distribution network and service agents

Built for Easy Sanitation

- Easy access front facing evaporator
- One-touch remedial cleaning; requires minimal interaction; just add chemical and let the machine do the rest. No ice removal from bin needed. (Use Manitowoc De-scaler and
- For detail cleaning; all food zone components removable by hand (no tools required). Fast and easy
- All white plastic interior, no exposed tubes or wires, smooth rounded corners for fast easy wipe downs
- The food zone is sealed from above and on the back of the door panel with commercial grade rubber gaskets
- · Alpha San anti-microbial agent molded in selected components
- Additional sanitation protection available with CleanAir™ packs to control the growth of bacteria, fungi and slime inside the food zone
- **based on 70F air / 50F water

Ice Shape



HALF KUBE ¾" x 1½" x ½" (.95 x 2.86 x 2. 22 cm)

<u>*</u> = 100%



7/8" x 7/8" x 7/8" (2.22 x 2.22 x 2.22 cm)

<u>**</u> = 100%



















Tel: 1.920.682.0161 Fax: 1.920.683.7589





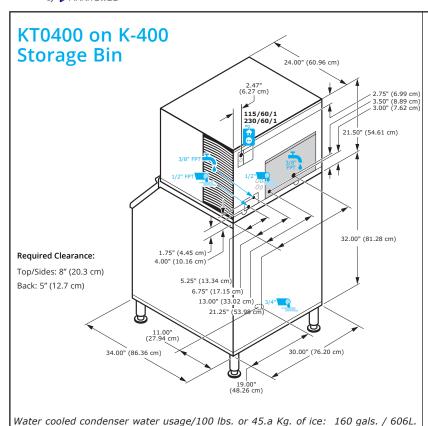

Space-Saving Design



KT0400 K-400

Height 59.50" 151.13 cm

Width 30.00" 76.2 cm

Depth 34.00" 86.30 cm

Bin 365 lbs.

Storage 165.7 kgs.

Measurements with bin legs at 6.00" (15.24cm). Adjustable bin legs 6.00" to 8.00" (15.24cm to 20.32cm). Bin capacity is based on 90% of the volume x 33 lbs/ft 3 average density of ice.

Specifications

			Ice Production 24 Hours		Power Usage kWh/100 lbs. @90°Air/70°F	Potable Water
	Model	lce Shape	70°/ 50°F 21°/ 10°C	90°/ 70°F 32°/ 21°C	1 Ph	Usage/100 lbs. 45.4 kgs. of Ice
AIR COOLED	KDT-0400A	kube	440 lbs.	345 lbs.	6.1	19 Gal.
			199 kgs	156 kgs		71.9 L
	KYT-0400A	half-kube	450 lbs.	350 lbs.	5.6 ★	19 Gal.
			204 kgs	159 kgs		71.9 L
WATER	KDT-0400W	kube	425 lbs.	360 lbs.	4.6	19 Gal.
			193 kgs	163 kgs		71.9 L
	KYT-0400W	half-kube	422 lbs.	360 lbs.	4.7	19 Gal.
			191 kgs.	163 kgs		71.9 L

Order ice machine and bin separately ★ indicates Energy Star 3.0 certified

Shipping Weight:

Air-cooled: 155 lbs (71kg) Water-cooled: 162 lbs (74 kg)



Accessories

Dispenser Bin Thermostat Kit Reduces condensation when used with dispensers.



Top Air Discharge KitConvert air flow to rear in-take / top exhaust.



Arctic Pure® Water Filters Reduces sediment and chlorine odors for better tasting ice.



Clean Air Pack Chlorine dioxide sachet to inhibit bacteria growth.



Welbilt reserves the right to make changes to the design or specifications without prior notice.

2110 South 26th Street Manitowoc, WI 54220 Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.kool-aire.com 6345B 04/20

